



THE BEAUTY OF
IMPER
FECTION


TECHNICAL
INFO

GRID

RO TECHNICAL INFO


GRID — FAMILY TILES

Grid4 - EN4034

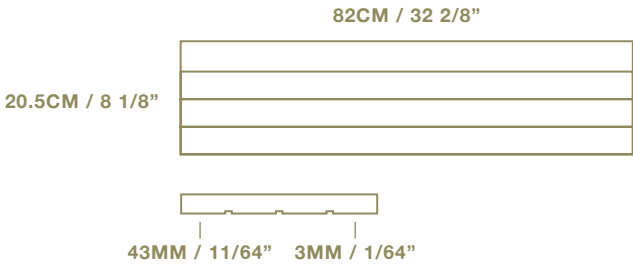


SURFACE FINISH


Grid Flat




Grid SandBlast





FIXED COMBINATION

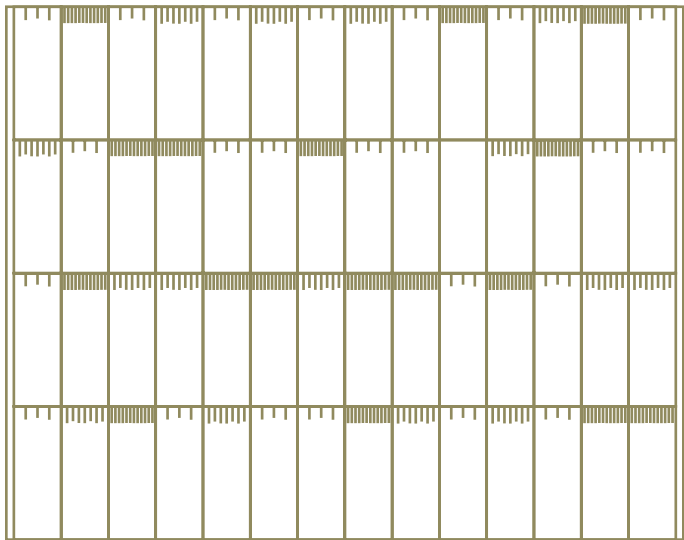

Grid8- EN4035

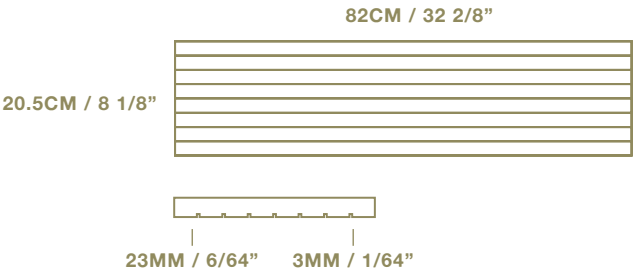

Grid16 - EN4036/EN4038 (Thickness 20/30 mm)

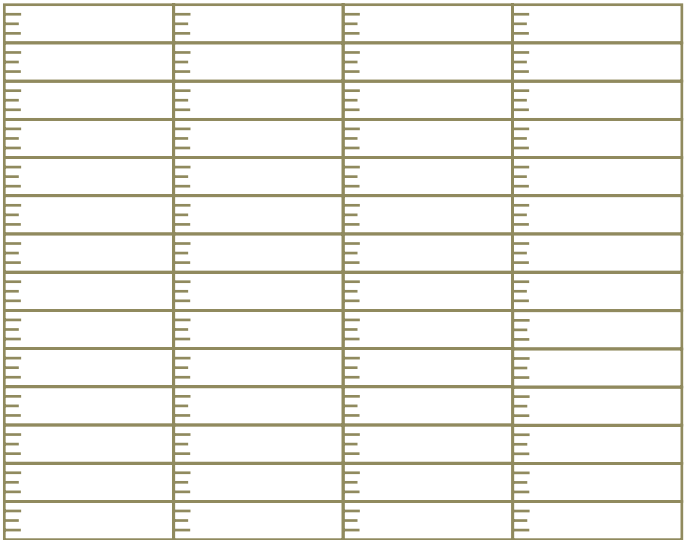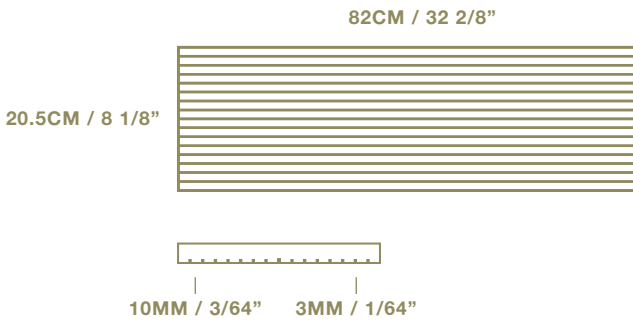

PACKING / INFORMATION


	PCS-SQM	PCS-CRATE	SQM-CRATE	KG-CRATE	SUITABILITY
Grid Mix Flat / Sandblasted	5.9	96	15.7	708	Interior / Exterior Use For Walls / Floring
Grid 4 Flat / Sandblasted	5.9	96	15.7	708	Interior / Exterior Use For Walls / Floring
Grid 8 Flat / Sandblasted	5.9	96	15.7	708	Interior / Exterior Use For Walls / Floring
Grid 16 Flat / Sandblasted	5.9	96	15.7	708	Interior / Exterior Use For Walls / Floring
Grid 16 3CM Flat / Sandblasted	5.9	68	11.43	743	Interior / Exterior Use For Walls / Floring

GENERAL MATERIAL PERFORMANCE DATA


* Tested according to NP EN1339 standart	Dimensions Tolerance	Bending Strength	Abrasion Resistance	Reaction To Fire	Slip / Skid	Water Absorption	Freeze / Thaw Resistance
	Class 3(R) ±2mm	Class 2(T) ≥4mpa	Class 4(II) ≤20mm	A1	Satisfactory	Class 2(B) ≤6% as a mean	Class 3(D) ≤1.0 kg/M²

COLOUR PALETTE

010 - Silver Fog



011 - Urban Mist



012 - Shadow Stone



013 - Powder Skin



030 - Dune Soft Sand



032 - Olive Grain



014 - Volcanic Lilac



019 - Graphite Ash



020 - Raw Terracotta



031 - Siena Dust



001 - Broken White

